


5258SHC5

CAT6A U/FTP 2x4P - 525 MHz LSZH Cca
Cable – Drum of 500m



DESCRIPTION

CAT6A cable for shielded cabling solutions for horizontal or vertical configurations. Combination of individual shielding and high-tech assembly giving high electromagnetic immunity: coupling attenuation > 75 dB. LSZH sheath - cable compliant with Cca in accordance with standard CPR EN50575.

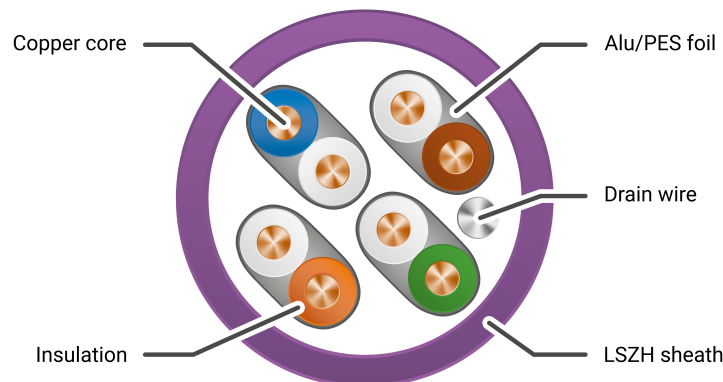

ADVANTAGES

- Tested up to 525 MHz
- Available in high CPR level (up to B2ca)



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	525xSHCyyyyyz
Core gauge	AWG23
Assembly type	Pairs
Shielding description	Aluminum polyester tape
Outer Sheath Material	LSZH
Color	Purple RAL 4001
Nom. diameter of the outer sheath (mm)	7.10 x 14.40
Ground drain presence	No
Shielding type	U/FTP
Insulation Color Code	Blue and White blue or White - Orange and White orange or White - Green and White green or White - Brown and White brown or White
Nominal insulation diameter (mm)	1,25

ELECTRICAL CHARACTERISTICS

Loop resistance	154
Minimum insulation resistance	> 5000 MΩ x km
Service Voltage (V)	<250Vdc
Linear electrical resistance (Ω/Km)	77
Mutual Capacity	< 45 pF
Capacity Imbalance	< 1600 pF/km

TRANSMISSION CHARACTERISTICS

Coupling attenuation (dB)	75
Delay skew	< 30
Unbalance resistance	< 2
Propagation speed (%)	78
Segregation Class	C
Performance Category	Category 6A
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO 11801 Ed.3 Classe Ea
Characteristic Impedance (Ohms)	100
Conductor/Shield Capacitance	1,6 nF/km
Conductor/Conductor Capacitance	45 nF/km

ENVIRONMENTAL CHARACTERISTIC

CPR classification	Cca s1, d1, a1
Fire behaviour	IEC 60332-1
Smoke emission	IEC 61034-1 & -2
Gas emission	IEC 60754-2
RoHS Compliance	Compliant with the RoHS directive
Component Standard	IEC 61156-5 Cat6A

ADDITIONAL INFORMATION

Product Packaging	Drum of 500m
Weight (Kg)	0.055

TRANSMISSION PERFORMANCE

FREQUENCY (Mhz)	INSERTION LOSS (dB/100M)		NEXT (dB/100M)		PSNEXT (dB/100M)		ACR-F (dB/100M)		PSACR-F (dB/100M)		RETURN LOSS (dB/100M)	
	Standard	Typical Value	Standard	Typical Value	Standard	Typical Value	Standard	Typical Value	Standard	Typical Value	Standard	Typical Value
4	-3,8	-3,6	-66,3	-102,1	-63,3	-99,1	-56,0	-102,5	-53,0	-99,5	-23,0	-26,5
10	-5,9	-5,5	-60,3	-113,3	-57,3	-110,3	-48,0	-103,4	-45,0	-100,4	-25,0	-33,3
16	-7,5	-7,0	-57,2	-111,7	-54,2	-108,7	-43,9	-104,9	-40,9	-101,9	-25,0	-33,5
20	-8,4	-7,9	-55,8	-112,1	-52,8	-109,1	-42,0	-102,7	-39,0	-99,7	-25,0	-37,7
31,25	-10,5	-10,1	-52,9	-113,9	-49,9	-110,9	-38,1	-101,1	-35,1	-98,1	-23,6	-34,5
62,5	-15,0	-14,6	-50,9	-110,8	-47,9	-107,8	-32,1	-103,5	-29,1	-100,5	-21,5	-34,5
100	-19,1	-18,5	-48,4	-113,1	-45,4	-110,1	-28,0	-96,2	-25,0	-93,2	-20,1	-35,0
125	-21,5	-21,5	-45,3	-109,5	-42,3	-112,5	-26,1	-95,5	-23,1	-98,5	-19,4	-35,2
155	-24,1	-24,1	-42,4	-109,3	-39,4	-112,3	-24,2	-90,2	-21,2	-93,2	-18,8	-35,6
200	-27,6	-26,5	-40,8	-108,9	-37,8	-105,9	-22,0	-86,9	-19,0	-83,9	-18,0	-36,4
250	-31,1	-29,0	-39,3	-108,5	-36,3	-111,5	-20,0	-85,3	-17,0	-88,3	-17,3	-32,0
300	-34,3	-32,7	-38,1	-108,0	-35,1	-105,0	-18,5	-83,2	-15,5	-80,2	-17,3	-29,2
350	-37,2	-35,4	-37,1	-108,0	-34,1	-111,0	-17,1	-80,1	-14,1	-83,1	-17,3	-39,0
400	-40,1	-37,9	-36,3	-107,5	-33,3	-104,5	-16,0	-78,3	-13,0	-75,3	-17,3	-28,5
450	-42,7	-40,2	-35,5	-108,0	-32,5	-111,0	-14,9	-77,0	-11,9	-80,0	-17,3	-28,5
500	-45,3	-43,1	-34,8	-108,0	-31,8	-105,0	-14,0	-75,5	-11,0	-72,5	-17,3	-28,0
525	N/A	-44,0	N/A	-100,0	N/A	-97,0	N/A	-70,0	N/A	-67,0	N/A	-25,0