


CAMTP06ALCDOM3

MTP cabled tray with 6 LC duplex OM3
adapters for CH1U fiber optic drawers

DESCRIPTION

6 or 12 LCD plug & play MTP tray for CH1U fiber optic drawers

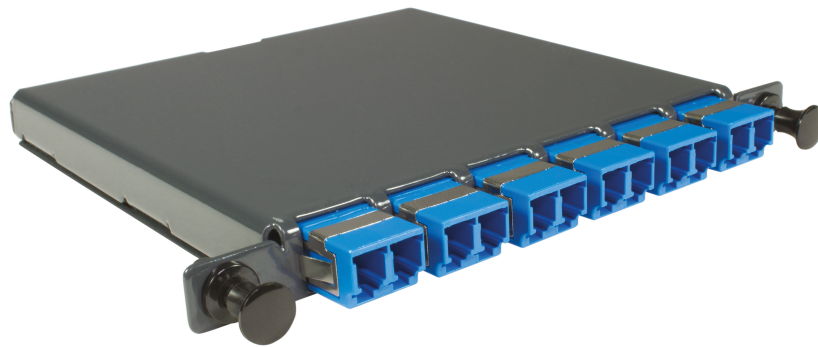

ADVANTAGES

- Rapid installation
- LGX standard
- Plug and play solution



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	CAMTPxxALCDyyy
Color	Anthracite Grey RAL 7016
Compatible optical connector	LC Duplex
Number of Optical Fibers	6
Number of Accepted Fibers	12
Optical Connector Type	LC Duplex
Dimensions (W x D x h)	25.1 x 100 x 65 mm
Containing Material	Tôle d' acier 15/10
Maximum Capacity Modularity	Fixation plug and play par bouton poussoir
Gross Scanned Weight of the US (g/km)	0.28

ELECTRICAL CHARACTERISTICS

Optical Performance	OM3
---------------------	-----

TRANSMISSION CHARACTERISTICS

Data Transmission Standard	EN 50173, ISO 11801 ED3, IEEE 802.3ae, TIA 568-C3
----------------------------	---

MECHANICAL CHARACTERISTICS

Installation type	Interior
-------------------	----------

ENVIRONMENTAL CHARACTERISTIC

IP rating	IP20
RoHS Compliance	Conforme RoHS
Standards	ISO 11801 ED2.2, EIA/TIA 568-C.3
Component Standard	IEC 61754-20, IEC 61754-7, TIA/568 EIA 604-5, TIA/EIA 455-21a

ADDITIONAL INFORMATION

Product Packaging	Unit
Weight (Kg)	0.28