

CORD6AS10JMSH

**CAT6A U/FTP RJ45 patch cord - Yellow - 10 m**




## DESCRIPTION

CORD6ASxMSH is a CAT6A U/FTP shielded patch cord from the MMC series. It is used for patching in a rack and/or the connection of IP equipment.

It is 100% component-certified and tested individually.

Its LSZH sheath available in different colors facilitates clear and quick identification.

Length from 0.5m.

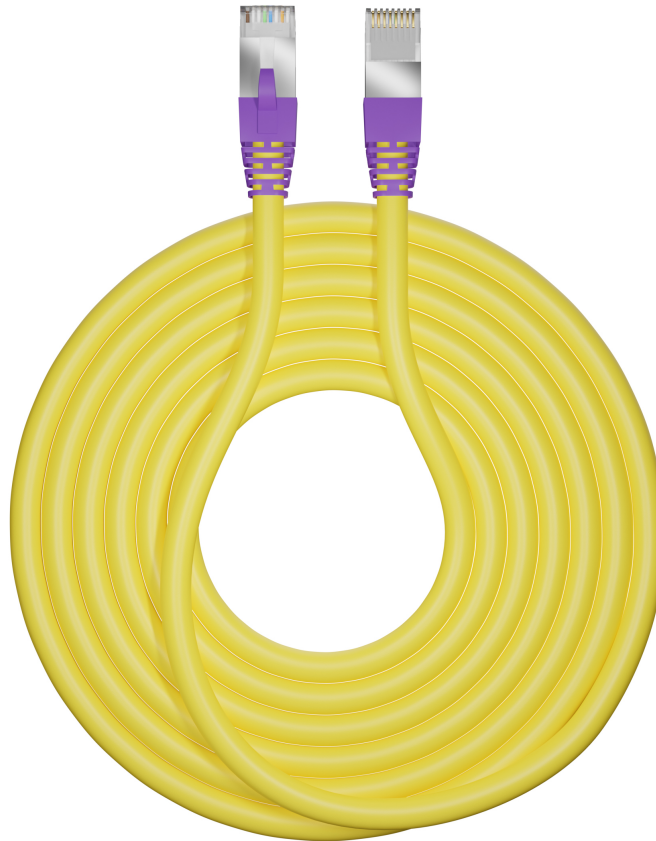

## ADVANTAGES

- 100% component-certified cord - individually tested
- Connection on 2 levels to optimize the NEXT
- 50 µinch gold coating



**CONSTRUCTION & TECHNICAL PERFORMANCE**

|                                       |                                                          |
|---------------------------------------|----------------------------------------------------------|
| Product Type                          | CORD6ASxxxymSH                                           |
| Color                                 | Yellow RAL 1018                                          |
| Shielding type                        | U/FTP                                                    |
| End 2 - Number of connectors 2        | 1                                                        |
| Cord Length (m)                       | 10m                                                      |
| Connector Format                      | Plug RJ45 Cat6A                                          |
| Inserter Type                         | Plug sur 2 niveaux de raccordement, optimisation du Next |
| Contact Nature                        | Phosphore Bronze revêtement Or                           |
| Gross Scanned Weight of the US (g/km) | 7,13                                                     |

**ELECTRICAL CHARACTERISTICS**

|                     |         |
|---------------------|---------|
| Service Voltage (V) | 150V AC |
| PoE type            | 4PPoE   |

**TRANSMISSION CHARACTERISTICS**

|                            |                                                                             |
|----------------------------|-----------------------------------------------------------------------------|
| Performance Category       | Category 6A                                                                 |
| Data Transmission Standard | EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO 11801 Ed.3 Classe Ea |

**MECHANICAL CHARACTERISTICS**

|                 |                |
|-----------------|----------------|
| Bending Radius  | 8 x Ø externe  |
| Insertion Cycle | 750 cycles min |

**ENVIRONMENTAL CHARACTERISTIC**

|                       |                      |
|-----------------------|----------------------|
| Fire behaviour        | IEC 60332-1, UL 94V0 |
| IP rating             | IP20                 |
| RoHS Compliance       | Conforme RoHS        |
| Operating Temperature | -20°C à +70°C        |
| Component Standard    | TIA 568-C.2 Cat6A    |

**ADDITIONAL INFORMATION**

|                   |                        |
|-------------------|------------------------|
| System Warranty   | 25 years               |
| Product Packaging | 100% biodegradable bag |
| Weight (Kg)       | 0_05                   |