

CORD6ASF0B005MSH


**CAT6A S/FTP AWG26 antibacterial
patch cord - 0,50 m**



DESCRIPTION

CAT6A S/FTP shielded RJ45 patch cord for patching in a rack and/or the connection of IP equipment. This patch cord is the perfect solution for aseptic environments such as agri-food or hospitals.

The Zero Bacteria cord meets the JIS Z280 anti-bacterial standard.

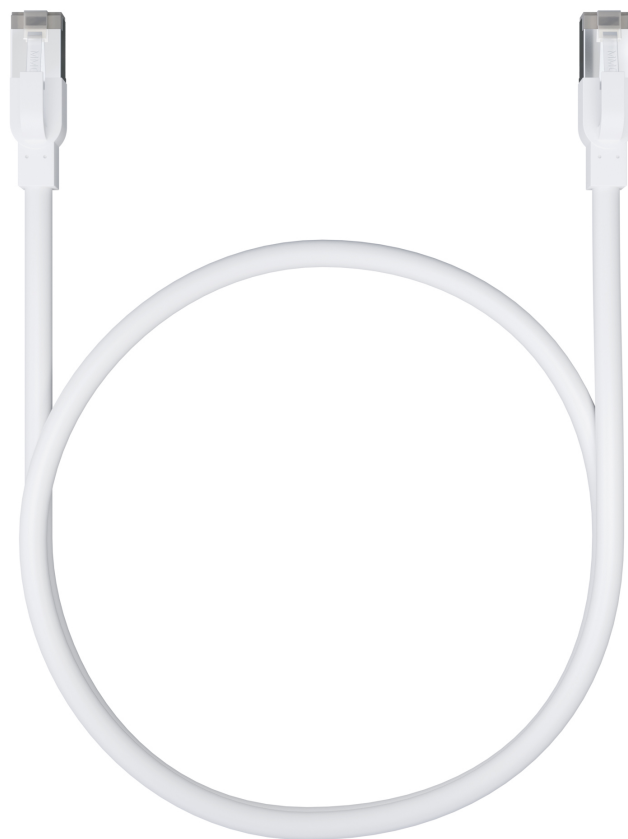

ADVANTAGES

- Antibacterial: JIS Z280
- Class Ea link-certified
- Optimized NEXT
- 50 µinch gold coating
- Excellent electromagnetic immunity thanks to S/FTP shielding
- LSZH sheath available in different colors for easy identification as per standard TIA-606A



Updated: 1/02/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	CORD6ASF0BxxMSH
Color	Signal White RAL 9003
Shielding type	S/FTP
End 2 - Number of connectors 2	1
Cord Length (m)	0.5m
Connector Format	Plug RJ45 Cat6A
Inserter Type	Plug sur 2 niveaux de raccordement. Optimisation du NEXT
Contact Nature	Phosphore Bronze plaqué or
Gross Scanned Weight of the US (g/km)	0,10

ELECTRICAL CHARACTERISTICS

Service Voltage (V)	150V AC
PoE type	4PPoE

TRANSMISSION CHARACTERISTICS

Performance Category	Category 6A
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO / IEC 11801 Ed3 Class Ea

MECHANICAL CHARACTERISTICS

Bending Radius	8 x Ø extérieur
Insertion Cycle	750 cycles min / 1000 nom

ENVIRONMENTAL CHARACTERISTIC

Fire behaviour	IEC 60332-1, UL 94V0
IP rating	IP20
RoHS Compliance	Oui
Operating Temperature	-20°C to +70°C
Component Standard	TIA 568-C.2 Cat6A

ADDITIONAL INFORMATION

System Warranty	25 years
Product Packaging	100% biodegradable bag
Weight (Kg)	0_005