


CORD6ASFA3002MSH

CAT6A S/FTP AWG30 patch cord - 2 m



DESCRIPTION

Designed to guarantee optimal protection against electromagnetic interference, the S/FTP patch cord makes it possible to obtain the performance of a Class Ea link extended up to 500 MHz. Its small diameter saves space when patching.

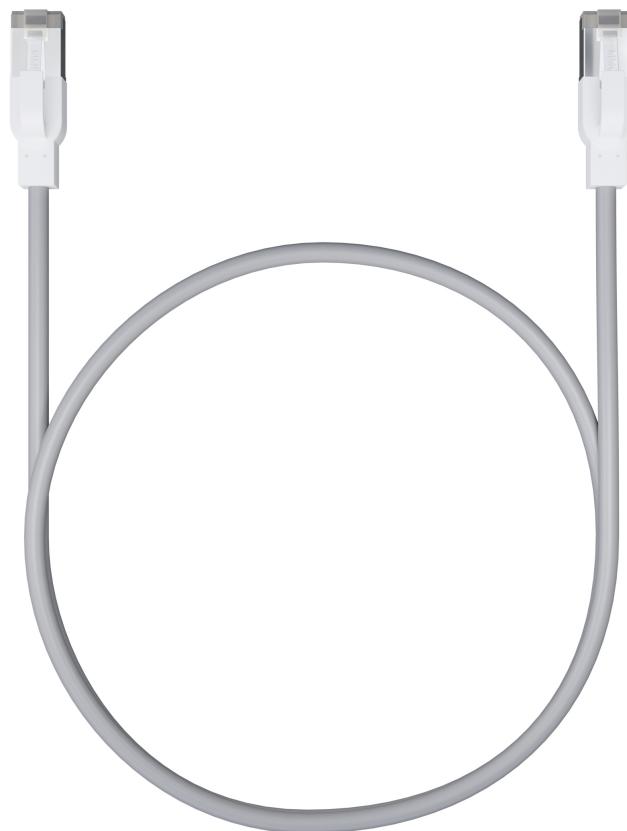

ADVANTAGES

- Excellent electromagnetic immunity thanks to S/FTP shielding
- Excellent transmission: connection on 2 levels to improve the NEXT
- Excellent transmission: very low contact resistivity
- Easy cable management: AWG30



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	CORD6ASFA30xxMSH
Color	Light Grey RAL 7035
Shielding type	S/FTP
End 2 - Number of connectors 2	1
Cord Length (m)	2m
Connector Format	Plug RJ45 Cat6A
Inserter Type	Plug sur 2 niveaux de raccordement. Optimisation du NEXT
Contact Nature	Phosphore, Bronze + plaquage Or 50 µm

ELECTRICAL CHARACTERISTICS

Service Voltage (V)	150 Veff
PoE type	4PPoE

TRANSMISSION CHARACTERISTICS

Performance Category	Category 6A
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO / IEC 11801 Ed3 Class Ea

MECHANICAL CHARACTERISTICS

Bending Radius	8 x Øext
Insertion Cycle	? 750 cycles

ENVIRONMENTAL CHARACTERISTIC

Fire behaviour	IEC 60332-1, UL 94V0
IP rating	IP20
RoHS Compliance	Oui
Operating Temperature	-20°C / +60°C
Component Standard	TIA 568-C.2 Cat6A

ADDITIONAL INFORMATION

System Warranty	25 years
Product Packaging	100% biodegradable bag
Weight (Kg)	0_02