


CORD6ASFA3003MSH

CAT6A S/FTP AWG30 patch cord - 3 m



DESCRIPTION

Designed to guarantee optimal protection against electromagnetic interference, the S/FTP patch cord makes it possible to obtain the performance of a Class Ea link extended up to 500 MHz. Its small diameter saves space when patching.

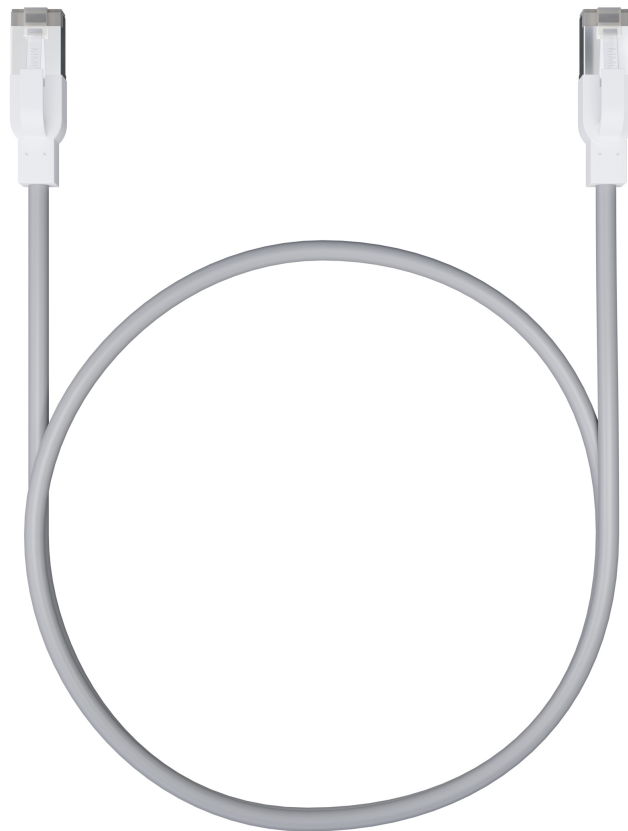

ADVANTAGES

- Excellent electromagnetic immunity thanks to S/FTP shielding
- Excellent transmission: connection on 2 levels to improve the NEXT
- Excellent transmission: very low contact resistivity
- Easy cable management: AWG30



Updated: 1/02/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	CORD6ASFA30xxMSH
Color	Light Grey RAL 7035
Shielding type	S/FTP
End 2 - Number of connectors 2	1
Cord Length (m)	3m
Connector Format	Plug RJ45 Cat6A
Insertier Type	Plug sur 2 niveaux de raccordement. Optimisation du NEXT
Contact Nature	Phosphore, Bronze + plaquage Or 50 µm

ELECTRICAL CHARACTERISTICS

Service Voltage (V)	150 Veff
PoE type	4PPoE

TRANSMISSION CHARACTERISTICS

Performance Category	Category 6A
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO / IEC 11801 Ed3 Class Ea

MECHANICAL CHARACTERISTICS

Bending Radius	8 x Øext
Insertion Cycle	? 750 cycles

ENVIRONMENTAL CHARACTERISTIC

Fire behaviour	IEC 60332-1, UL 94V0
IP rating	IP20
RoHS Compliance	Oui
Operating Temperature	-20°C / +60°C
Component Standard	TIA 568-C.2 Cat6A

ADDITIONAL INFORMATION

System Warranty	25 years
Product Packaging	100% biodegradable bag
Weight (Kg)	0_03