


CORD6F02M

CAT6 F/UTP MMC RJ45 patch cord - 2 m



## DESCRIPTION

CORD6FxM is a CAT6 F/UTP shielded patch cord from the MMC series. It is used for patching in a rack and/or the connection of IP equipment. Its PVC sheath available in different colors facilitates clear and quick identification. Length from 0.5m.

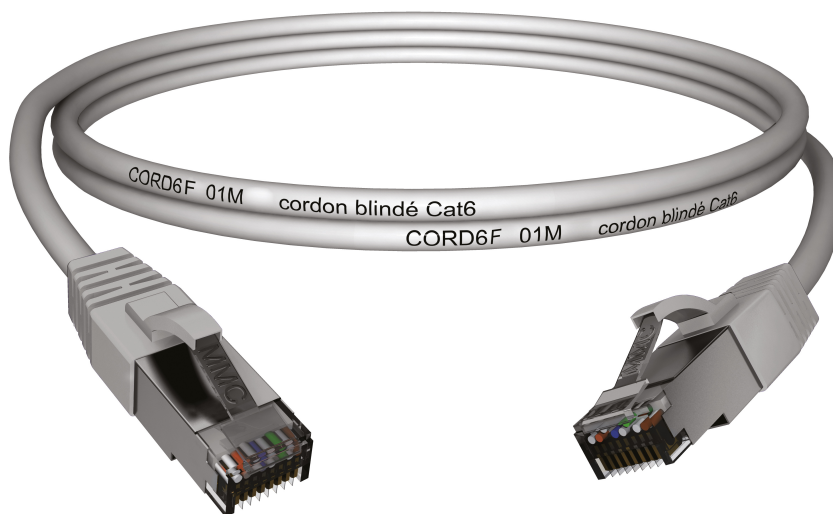

## ADVANTAGES

- Cat6 link-certified
- Optimized NEXT



**CONSTRUCTION & TECHNICAL PERFORMANCE**

|                                       |                                                   |
|---------------------------------------|---------------------------------------------------|
| Product Type                          | CORD6FxxxyM                                       |
| Color                                 | Grey RAL 7035                                     |
| Shielding type                        | F/UTP                                             |
| End 2 - Number of connectors 2        | 1                                                 |
| Cord Length (m)                       | 2m                                                |
| Connector Format                      | Plug RJ45 Cat6                                    |
| Inserter Type                         | Optimisation du Next grâce à son plug à 2 niveaux |
| Contact Nature                        | Phosphore Bronze revêtement Or                    |
| Gross Scanned Weight of the US (g/km) | 4,60                                              |

**ELECTRICAL CHARACTERISTICS**

|                     |         |
|---------------------|---------|
| Service Voltage (V) | 150V AC |
|---------------------|---------|

**TRANSMISSION CHARACTERISTICS**

|                            |                                                                          |
|----------------------------|--------------------------------------------------------------------------|
| Performance Category       | Category 6                                                               |
| Data Transmission Standard | EIA/TIA 568-C.2 Cat6, EN 50173-1: 2011 Classe E, ISO 11801 Ed.3 Classe E |

**MECHANICAL CHARACTERISTICS**

|                 |                           |
|-----------------|---------------------------|
| Bending Radius  | 8 x Ø externe             |
| Insertion Cycle | 750 cycles min / 1000 nom |

**ENVIRONMENTAL CHARACTERISTIC**

|                       |                      |
|-----------------------|----------------------|
| Fire Standard         | IEC 60332-1, UL 94V0 |
| IP rating             | IP20                 |
| RoHS Compliance       | Conforme RoHS        |
| Operating Temperature | -20°C à +70°C        |
| Component Standard    | TIA 568-C.2 Cat6     |

**ADDITIONAL INFORMATION**

|                        |                        |
|------------------------|------------------------|
| REF                    | CORD6F02M              |
| SKU Collection Photo   | cord6fxxym_hd          |
| Pictogram              | cat6                   |
| System Warranty        | 15 years               |
| Model Collection Photo | cord6fxxym_hd          |
| Product Range          | Multimedia Connecct    |
| Product Packaging      | 100% biodegradable bag |