


ECORD6ASF02BMSH

CAT6A S/FTP RJ45 patch cord - Blue - 2  
m



## DESCRIPTION

ECORD6ASFxMSH is a CAT6A S/FTP shielded patch cord from the LINK+ series. It is used for patching in a rack and/or the connection of IP equipment. Its LSZH sheath available in different colors facilitates clear and quick identification. Length from 0.5m.

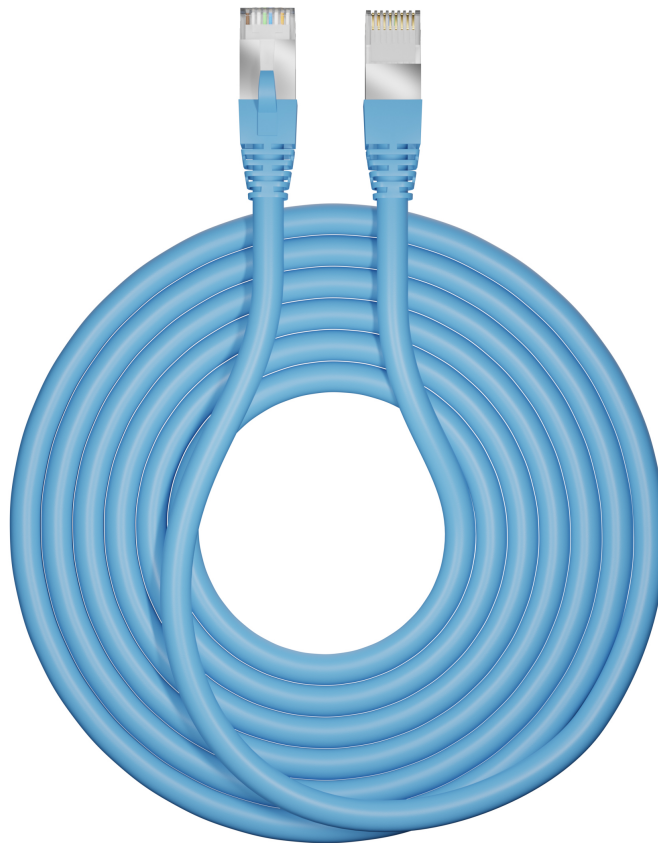

## ADVANTAGES

- Compliant with the requirements of the Cat6A standards
- Gold-plated contacts with low resistivity
- Excellent value for money



**CONSTRUCTION & TECHNICAL PERFORMANCE**

|                                       |                                |
|---------------------------------------|--------------------------------|
| Product Type                          | ECORD6ASFxxxymSH               |
| Color                                 | Blue RAL 5015                  |
| Shielding type                        | S/FTP                          |
| End 2 - Number of connectors 2        | 1                              |
| Cord Length (m)                       | 2m                             |
| Connector Format                      | Plug RJ45 Cat6A                |
| Contact Nature                        | Phosphore Bronze revêtement Or |
| Gross Scanned Weight of the US (g/km) | 5,866                          |

**ELECTRICAL CHARACTERISTICS**

|                     |         |
|---------------------|---------|
| Service Voltage (V) | 150V AC |
|---------------------|---------|

**TRANSMISSION CHARACTERISTICS**

|                            |                                                                                |
|----------------------------|--------------------------------------------------------------------------------|
| Performance Category       | Category 6A                                                                    |
| Data Transmission Standard | EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011<br>Classe Ea, ISO 11801 Ed.3 Classe Ea |

**MECHANICAL CHARACTERISTICS**

|                 |                           |
|-----------------|---------------------------|
| Bending Radius  | 8 x Ø externe             |
| Insertion Cycle | 750 cycles min / 1000 nom |

**ENVIRONMENTAL CHARACTERISTIC**

|                       |                      |
|-----------------------|----------------------|
| Fire behaviour        | IEC 60332-1, UL 94V0 |
| IP rating             | IP20                 |
| RoHS Compliance       | Conforme RoHS        |
| Operating Temperature | -20°C à +70°C        |
| Component Standard    | TIA 568-C.2 Cat6A    |

**ADDITIONAL INFORMATION**

|                   |                        |
|-------------------|------------------------|
| System Warranty   | Nothing                |
| Product Packaging | 100% biodegradable bag |
| Weight (Kg)       | 0_02                   |