



INTEX24OM4C

OM4 24 cores central loose tube optical fiber cable - LSZH Cca sheath - Indoor/Outdoor



DESCRIPTION

INTEXxxC fibers, intended for indoor and outdoor installations, are available in single-mode or multimode and can contain up to 24 fibers in a central tube. INTEX cables comply with IEC, ITU and TIA specifications and are declared Cca under CPR EN 50575.

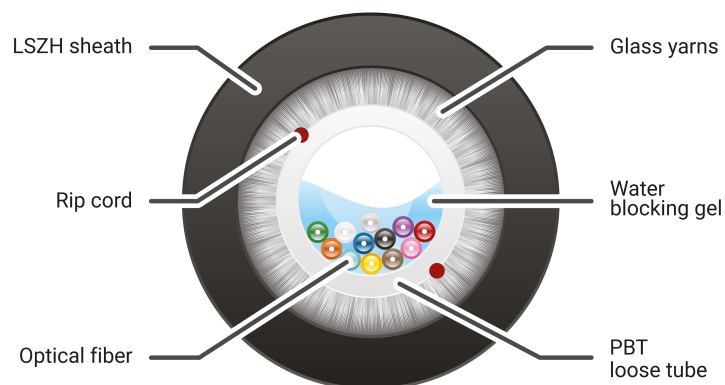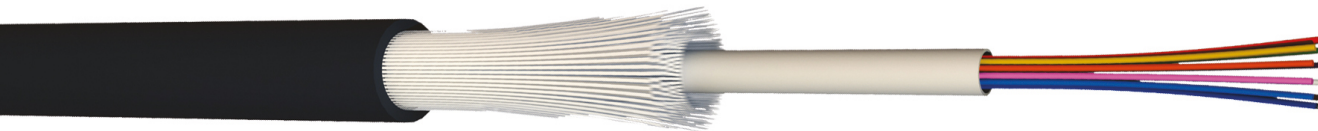

ADVANTAGES

- Moderate protection against rodents
- Good watertightness for universal use
- Black LSZH sheath for good UV resistance
- Flame retardant



Updated: 1/02/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	INTEXxyyyC
Color	Black RAL 9005
Minimum diameter of the outer sheath (mm)	5.7
Nom. diameter of the outer sheath (mm)	6
Max. diameter of the outer sheath (mm)	6.3
Number of active tubes	1
Total number of tubes	1
Number of Optical Fibers	24
Number of Fibers per Tube	24
Sheath Type	LSZH

ELECTRICAL CHARACTERISTICS

Optical Performance	OM4
---------------------	-----

TRANSMISSION CHARACTERISTICS

Data Transmission Standard	ISO 11801-1 et TIA 568-3.D
----------------------------	----------------------------

MECHANICAL CHARACTERISTICS

Structure	Libre
Max Short-Term Tensile Strength	1200
Max Long-Term Tensile Strength	1200 N
Bending Radius in Fixed Installation	20 x Ø ext
Bending Radius in Mobile Installation	20 x Ø ext
Max Short-Term Crush Resistance	1800
Max Long-Term Crush Resistance	1800 N/dm

ENVIRONMENTAL CHARACTERISTIC

CPR classification	Cca s1, d1, a1
Fire behaviour	IEC 60332-1
Smoke emission	IEC 61034-1
Gas emission	IEC 60754-2
UV Resistance	No
Component Standard	IEC 60794-1-2

ADDITIONAL INFORMATION

Product Packaging	Drum of 4000m
Weight (Kg)	0.062

Additional Information

Color code of fibers according to standards
TIA/EIA 598A and IEC 304

1	2	3	4	5	6	7	8	9	10	11	12
											
13	14	15	16	17	18	19	20	21	22	23	24
											