



INTEX24OS2C

OS2 24 cores central loose tube optical fiber cable - LSZH Cca sheath - Indoor/Outdoor



DESCRIPTION

INTEXxxC fibers, intended for indoor and outdoor installations, are available in single-mode or multimode and can contain up to 24 fibers in a central tube. INTEX cables comply with IEC, ITU and TIA specifications and are declared Cca under CPR EN 50575.

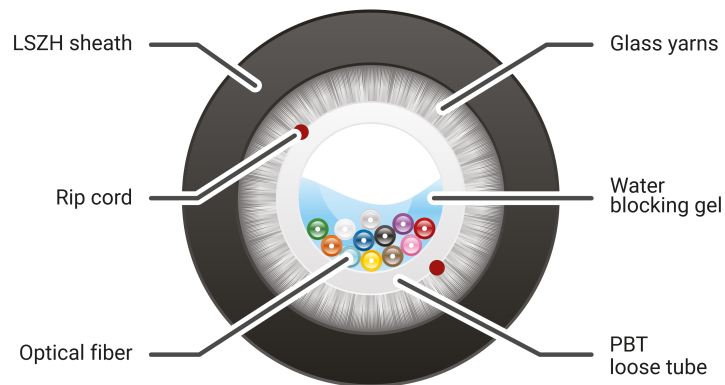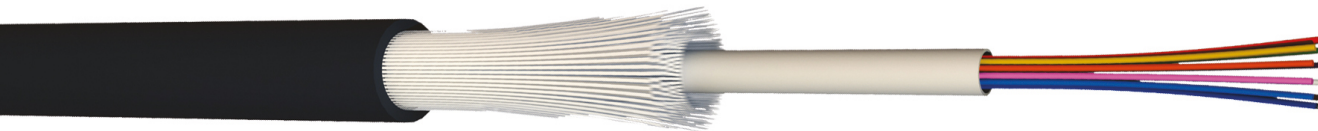

ADVANTAGES

- Moderate protection against rodents
- Good watertightness for universal use
- Black LSZH sheath for good UV resistance
- Flame retardant



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	INTEXxyyyC
Color	Black RAL 9005
Minimum diameter of the outer sheath (mm)	5.7
Nom. diameter of the outer sheath (mm)	6
Max. diameter of the outer sheath (mm)	6.3
Number of active tubes	1
Total number of tubes	1
Number of Optical Fibers	24
Number of Fibers per Tube	24
Sheath Type	LSZH

ELECTRICAL CHARACTERISTICS

Optical Performance	OS2
---------------------	-----

TRANSMISSION CHARACTERISTICS

Data Transmission Standard	ISO 11801-1 et TIA 568-3.D
----------------------------	----------------------------

MECHANICAL CHARACTERISTICS

Structure	Libre
Max Short-Term Tensile Strength	1200
Max Long-Term Tensile Strength	1200 N
Bending Radius in Fixed Installation	20 x Ø ext
Bending Radius in Mobile Installation	20 x Ø ext
Max Short-Term Crush Resistance	1800
Max Long-Term Crush Resistance	1800 N/dm

ENVIRONMENTAL CHARACTERISTIC

CPR classification	Cca s1, d1, a1
Fire behaviour	IEC 60332-1
Smoke emission	IEC 61034-1
Gas emission	IEC 60754-2
UV Resistance	No
Component Standard	IEC 60794-1-2

ADDITIONAL INFORMATION

Product Packaging	Drum of 4000m
Weight (Kg)	0.062

Additional Information

Color code of fibers according to standards
TIA/EIA 598A and IEC 304

1	2	3	4	5	6	7	8	9	10	11	12
											
13	14	15	16	17	18	19	20	21	22	23	24
											