

JLCLC10UPPTSOS2


Extractable and reversible LC/LC OS2
fiber optic jumper - 10 m

DESCRIPTION

MMC OM3 LC/LC UPPTS jumpers have a pull tab to make patching operations easier for high-density applications, such as data centers.

They satisfy the prerequisites in terms of low bend radius and ease of insertion-extraction in SAN (Storage Area Network) environments.

They are also suitable for LAN (Local Area Network) networks, and reduce the space needed for patching by 50% thanks to their small diameter.

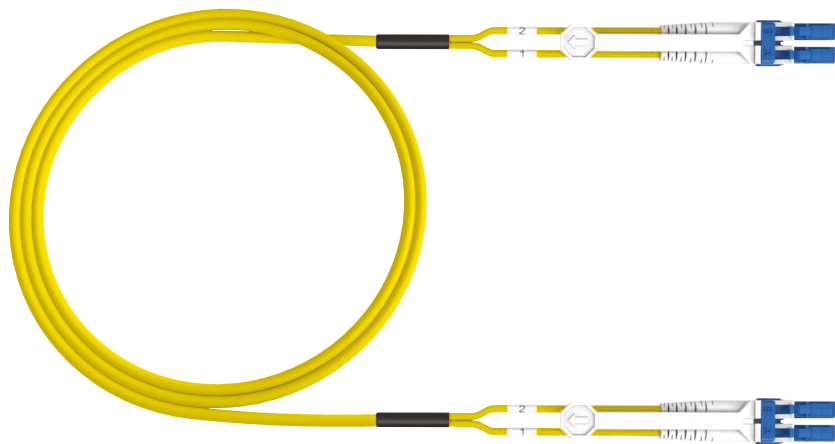

ADVANTAGES

3mm LC duplex round jumpers for high densities – Pull tab to make patching easier – Suitable for all types of polarity thanks to their reversibility – High performance: low bend radius



CONSTRUCTION & TECHNICAL PERFORMANCE

| | |
|--|-----------------|
| Product Type | JLCLCxxUPPTSyyy |
| Product Length | 10 m |
| Available Colors for Optical Connector | Blue |
| Sheath Type | LSZH |
| Gross Scanned Weight of the US (g/km) | 0,20 |
| Cable Diameter (mm) | 3 |

ELECTRICAL CHARACTERISTICS

| | |
|---------------------|-----|
| Optical Performance | OS2 |
| Insertion Loss | 25 |

TRANSMISSION CHARACTERISTICS

| | |
|-------------|-----|
| Test Report | oui |
|-------------|-----|

MECHANICAL CHARACTERISTICS

| | |
|----------------------|-----------|
| Bending Radius | 3,8cm |
| Tensile Strength (N) | 70 |
| Polishing Type | UPC / UPC |

ENVIRONMENTAL CHARACTERISTIC

| | |
|-----------------|-----------------------------------|
| RoHS Compliance | oui |
| Standards | Rapport de test individuel fourni |

ADDITIONAL INFORMATION

| | |
|-------------------|------------------------|
| Product Packaging | 100% biodegradable bag |
| Weight (Kg) | 0.2 |