


PIGLC2OS2

LC OS2 fiber optic pigtail



DESCRIPTION

2m long MMC OM3 fiber optic pigtails are an ideal solution for connection by fusion. Each pigtail has been individually tested and thereby ensures optimum performance (test report included).

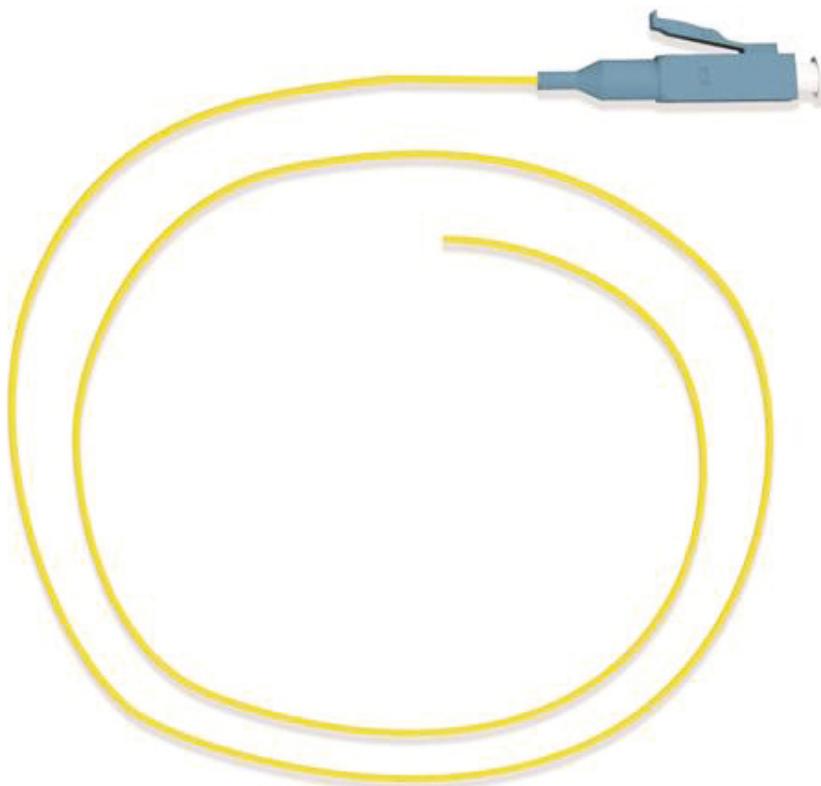

ADVANTAGES

- Compatible with all LC connectors on the market,
- Performance: test report included,
- Easy stripping due to its semi-loose structure.



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	PIGxx2OS2yy
Color	Yellow
Number of Optical Fibers	1
Optical Connector Type	LC
Product Length	2 m
Available Colors for Optical Connector	Blue
Modularity Table	https://adaltra.cloud.akeneo.com/api/rest/v1/media-files/1/7/f/a/17fa6467be931f0c7210e4aa841b9e6fd07e1946_PERF_OPTIQUE_PIGOS2_FR.png/download
Sheath Type	LSZH
Core Material	Composite

ELECTRICAL CHARACTERISTICS

Optical Performance	OS2
Insertion Loss	< 0,2 dB
Return Loss	< -35 dB

TRANSMISSION CHARACTERISTICS

Data Transmission Standard	IEC 60793-2-50, ISO 11801-1 et TIA 568-3.D
Test Report	Yes

MECHANICAL CHARACTERISTICS

Structure	Semi serrée
Bending Radius	10 x D
Crushing Resistance (N)	0,1
Tensile Strength (N)	6
Polishing Type	UPC

ENVIRONMENTAL CHARACTERISTIC

RoHS Compliance	RoHS compliance
Standards	<ul style="list-style-type: none"> - ISO 11801 Ed3 - TIA 568-3.D - IEC 60794-2-10 - IEC 61754-20
Component Standard	IEC 61754-20

ADDITIONAL INFORMATION

Product Packaging	100% biodegradable bag
-------------------	------------------------

ADDITIONAL INFORMATION

Weight (Kg)	0.01
-------------	------