


UHDPANEL3U288C

3U 19" ultra high density fiber optic
drawer up to 288 FO

DESCRIPTION

UHD, ultra high density, 19" fiber optic frame for 288 fibers on 3U

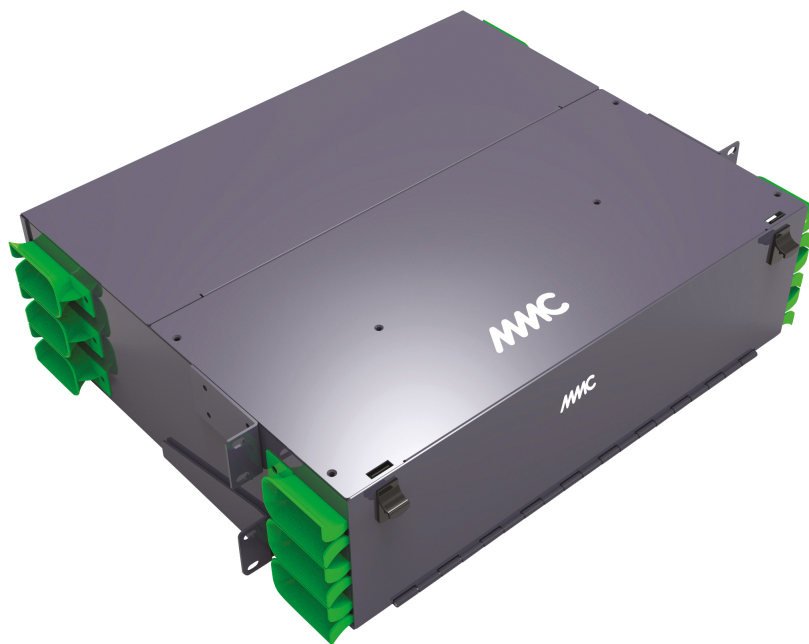

ADVANTAGES

- High port density: drawer for 12 MTP 12C trays, i.e. 144FO
- Connection modularity: 3 independent levels of 4 trays
- Easy cable management:
Total protection of jumpers thanks to the front door
Side management thanks to the rear rings and front openings
Rear cover providing direct access to the connection zone



Updated: 1/02/2026

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

CONSTRUCTION & TECHNICAL PERFORMANCE

| | |
|---------------------------------------|--------------------------|
| Product Type | UHD PANELxUyyyC |
| Color | Anthracite Grey RAL 7016 |
| Compatible optical connector | LC Duplex |
| Number of Optical Fibers | 288 |
| U Height | 3U |
| Number of Accepted Fibers | Jusqu'à 288 FO |
| Optical Connector Type | LC Duplex |
| Inch Format | 19" |
| Dimensions (W x D x h) | 130 x 482,6 x 426 mm |
| Containing Material | Acier 15/10 |
| Gross Scanned Weight of the US (g/km) | 7,06 |

ELECTRICAL CHARACTERISTICS

| | |
|---------------------|--------|
| Optical Performance | Aucune |
|---------------------|--------|

TRANSMISSION CHARACTERISTICS

| | |
|----------------------------|-------------------------------------|
| Data Transmission Standard | EN 50173, ISO 11801 ED3, TIA 568-C3 |
|----------------------------|-------------------------------------|

MECHANICAL CHARACTERISTICS

| | |
|-----------------------|--------------|
| Optical mounting type | Rackable 19" |
| Installation type | Interior |

ENVIRONMENTAL CHARACTERISTIC

| | |
|-----------------|---|
| IP rating | IP20 |
| RoHS Compliance | Conforme RoHS |
| Standards | - TIA/EIA 568 C.3 - ISO/IEC 11801 Ed3 - EN 50173 - ROHS, REACH, SvHC |
| UV Resistance | No |

ADDITIONAL INFORMATION

| | |
|-------------------|--------|
| Product Packaging | Carton |
| Weight (Kg) | 7.06 |