


VG50405MSH

CAT6 U/UTP RJ45 patch cord - 0.5 m



## DESCRIPTION

VG504xMSH is a CAT6 U/UTP unshielded patch cord from the MMC series. It is used for patching in a rack and/or the connection of IP equipment. It is 100 % component-certified and tested individually. Its LSZH sheath available in different colors facilitates identification as per standard TIA-606A. Length from 0.5m.

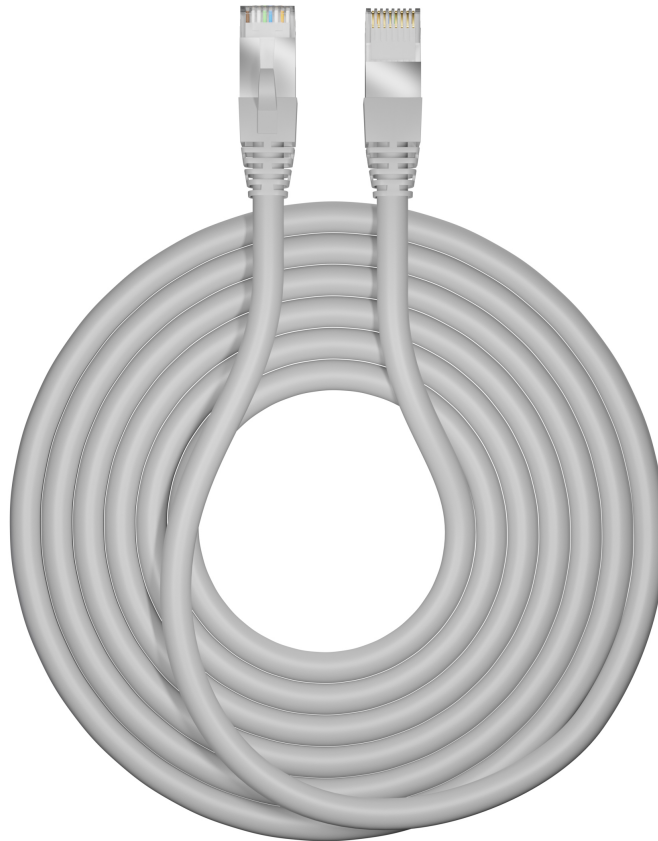

## ADVANTAGES

- Exceeds the requirements of Cat6 standards
- 100% component-certified cord - individually tested
- Optimized NEXT
- LSZH sheath available in different colors for easy identification as per standard TIA-606A



Updated: 19/12/2025

This document is confidential and is the property of ADALTRA. ADALTRA holds the copyright, and the document must not be copied or modified in any form, in whole or in part, without the prior written permission of ADALTRA. The specifications contained in this document are non-contractual and may be subject to change without prior notice.

**CONSTRUCTION & TECHNICAL PERFORMANCE**

Product Type	VG504xxxymsh
Color	Grey RAL 7035
Shielding type	U/UTP
Cord Length (m)	0.5m
Connector Format	Plug RJ45 Cat6
Insert Type	Optimisation du Next grâce à son plug à 2 niveaux
Contact Nature	Phosphore Bronze revêtement Or
Gross Scanned Weight of the US (g/km)	4,30

**ELECTRICAL CHARACTERISTICS**

PoE type	PoE+
Service Voltage (V)	150V AC

**TRANSMISSION CHARACTERISTICS**

Performance Category	Category 6
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO 11801 Ed.3 Classe Ea

**MECHANICAL CHARACTERISTICS**

Bending Radius	8 x Ø externe
Insertion Cycle	750 cycles min

**ENVIRONMENTAL CHARACTERISTIC**

Fire Standard	IEC 60332-1, UL 94V0
IP rating	IP20
RoHS Compliance	Conforme RoHS
Operating Temperature	-20°C à +70°C
Component Standard	TIA 568-C.2 Cat6

**ADDITIONAL INFORMATION**

REF	VG50405MSH
SKU Collection Photo	vg504xmsh_hd
Pictogram	cat6
System Warranty	25 years
Model Collection Photo	vg504xbmsh_hd
Product Range	Multimedia Connecct
Product Packaging	Bag