

CORD6AS01MSH

CAT6A U/FTP RJ45 patch cord - 1 m




DESCRIPTION

CORD6ASxMSH is a CAT6A U/FTP shielded patch cord from the MMC series. It is used for patching in a rack and/or the connection of IP equipment.

It is 100% component-certified and tested individually.

Its LSZH sheath available in different colors facilitates clear and quick identification.

Length from 0.5m.

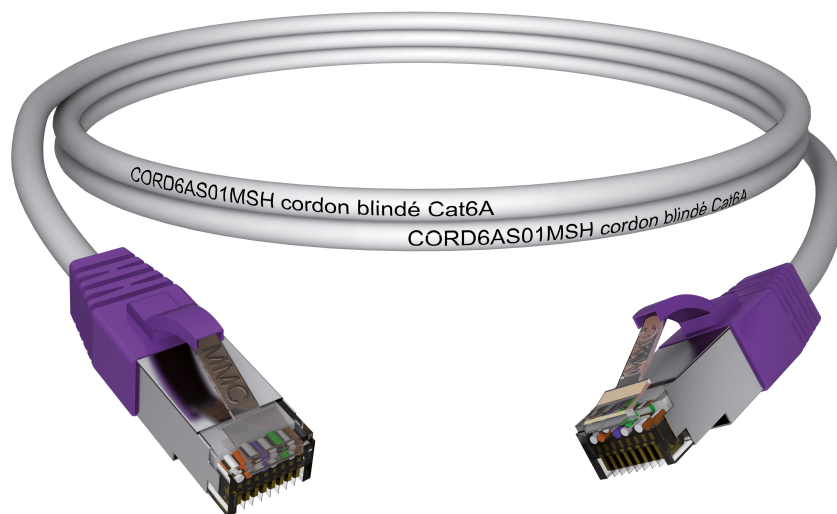

ADVANTAGES

- 100% component-certified cord - individually tested
- Connection on 2 levels to optimize the NEXT
- 50 µinch gold coating



CONSTRUCTION & TECHNICAL PERFORMANCE

Product Type	CORD6ASxxxymSH
Color	Grey RAL 7035
Shielding type	U/FTP
End 2 - Number of connectors 2	1
Cord Length (m)	1m
Connector Format	Plug RJ45 Cat6A
Inserter Type	Plug sur 2 niveaux de raccordement, optimisation du Next
Contact Nature	Phosphore Bronze revêtement Or
Gross Scanned Weight of the US (g/km)	4,90

ELECTRICAL CHARACTERISTICS

Service Voltage (V)	150V AC
PoE type	4PPoE

TRANSMISSION CHARACTERISTICS

Performance Category	Category 6A
Data Transmission Standard	EIA/TIA 568-C.2 Cat6A, EN 50173-1: 2011 Classe Ea, ISO 11801 Ed.3 Classe Ea

MECHANICAL CHARACTERISTICS

Bending Radius	8 x Ø externe
Insertion Cycle	750 cycles min

ENVIRONMENTAL CHARACTERISTIC

Fire behaviour	IEC 60332-1, UL 94V0
IP rating	IP20
RoHS Compliance	Conforme RoHS
Operating Temperature	-20°C à +70°C
Component Standard	TIA 568-C.2 Cat6A

ADDITIONAL INFORMATION

System Warranty	25 years
Product Packaging	100% biodegradable bag
Weight (Kg)	0_01